
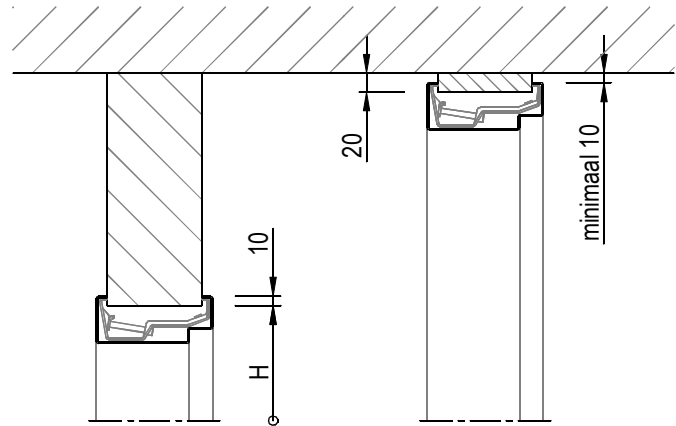
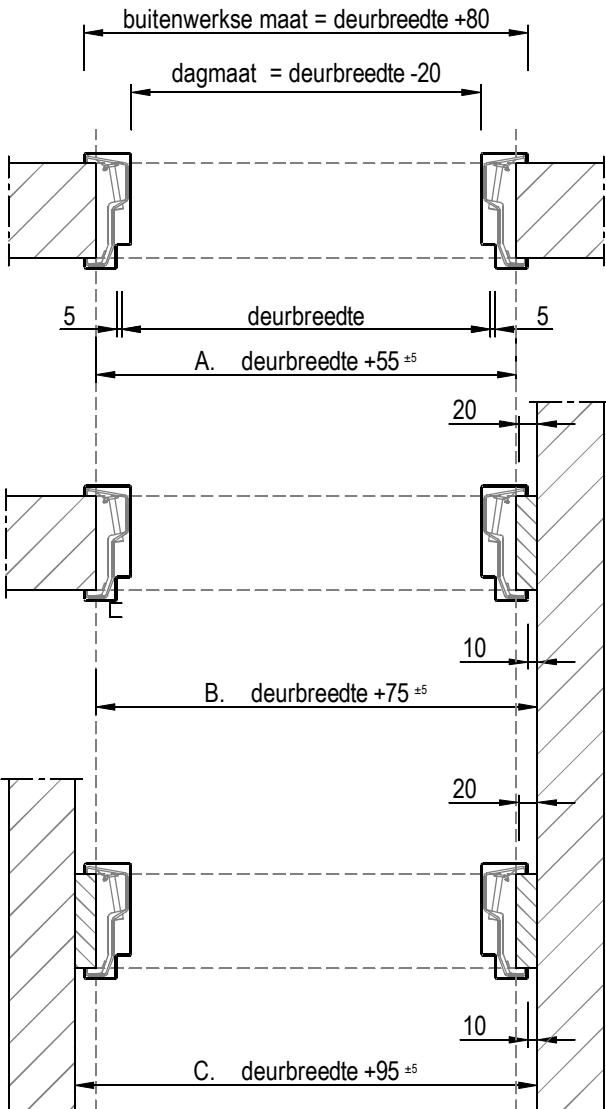


ANDUSTA

STALEN BINNENDEURKOZIJNEN

Sparingsmaten t.b.v. opdek montagekozijn

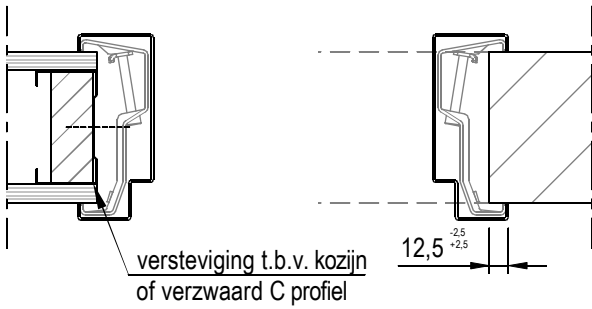

| HOOGTE [mm] | | | sparing | |
|-------------|-----|--------|---------|--|
| deur | ROD | kozijn | H | |
| 2315 | 28 | 2374 | 2364 | |
| 2315 | 20 | 2366 | 2356 | |
| 2315 | 13 | 2359 | 2349 | |
| 2115 | 28 | 2174 | 2164 | |
| 2115 | 20 | 2166 | 2156 | |
| 2115 | 13 | 2159 | 2149 | |

ROD = Ruimte Onder Deur

sparing (+ 5 / - 5 mm.)

| BREEDTE [mm] | | sparing (tol. $^{+5}_0$ mm) | | |
|--------------|------|------------------------------|------|------|
| deur | BWM | A. | B. | C. |
| 630 | 710 | 685 | 705 | 725 |
| 680 | 760 | 735 | 755 | 775 |
| 730 | 810 | 785 | 805 | 825 |
| 780 | 860 | 835 | 855 | 875 |
| 830 | 910 | 885 | 905 | 925 |
| 880 | 960 | 935 | 955 | 975 |
| 930 | 1010 | 985 | 1005 | 1025 |
| 980 | 1060 | 1035 | 1055 | 1075 |

sparing (+ 5 / 0 mm.)

